


INSTALLATION GUIDE

Mount-on stormclip for plain tiles

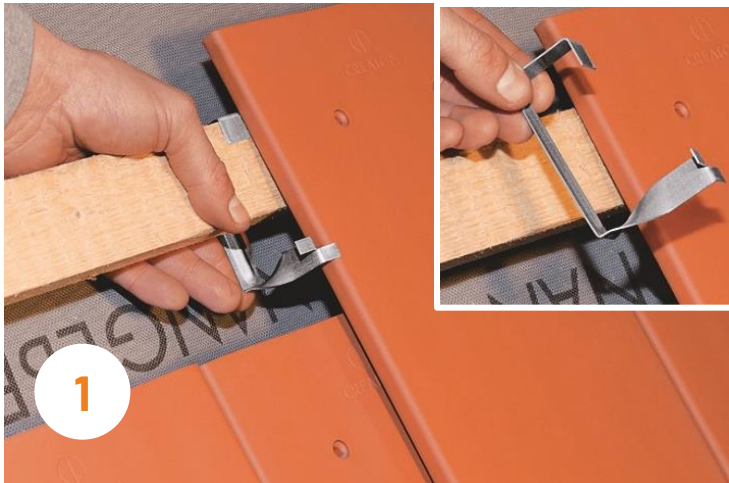


The mount-on stormclip is used for wind protection for pitched roofs with double-cover in accordance with professional regulations and tested according to EN 14437.

The „T“ shaped end of the stormclip fasten two plain tiles at the same time, one in the left and one in the right according to the gap.

The clip is hooked to the roof batten then the lower end is pressed slightly upwards. According to the batten dimensions, the appropriate clip should be chosen.

The number and layout of the stormclips must be determined according to the local standards and regulations!

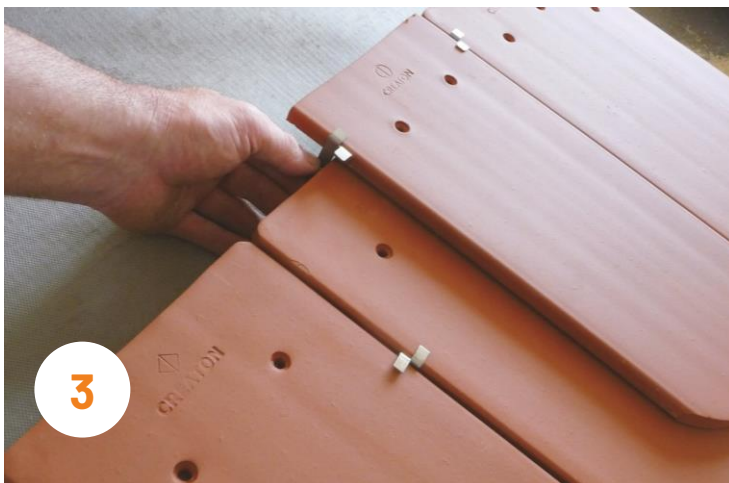

The crown-covering stormclip is used for plain tiles which installed in crown-cover and it connects the top tile layer to the layer below and is particularly used for buildings in exposed locations.

The crown-covering clip is placed between two tiles in the upper layer. The wings attach the two plain tiles to the right and left side into the tile below.

This clip is used in addition to the mount-on storm clip. The number of clips depends on the number of tiles (cc. 1/3 crown-cover clip and 2/3 mount-on clip should be used).

Note: A crown covering clip is used to attach only a plain tile.