

# INSTALLATION GUIDE

## Thermal-exhaust pipe outlet tile



1

Use the lid of the box, designed as a template, to cut out the underlay.

Separate the template according to the desired diameter. To do this, press in the pre-pressed (perforated) circles!



2

Adjust the template to the correct position with the help of the OUTLET tile and GLUE it to the underlay.

Mark the location of the cut on the UNDERLAYMENT (along the outer edge of the template).



3

Cut the underlay along the mark using a safety knife.

Always use a rigid formwork below the outlets to support the underlay connection bushing.

Cut this formwork using a drill.



4

Thread the bottom ring clockwise beneath the underlay. To do so, align the notch on the ring to the spot that has been cut and twist the entire ring into place.



5

The top ring can be mounted with or without the rubber flange.

Press the top ring onto the bottom one until you hear a click.



6

Mark the diameter of the antenna pipe on the rubber flange and cut it along the pre-made groove.



7

Place the outlet tile onto the roof. Place the hood (calotte) onto the outlet tile according to the slope of the roof (see the chart in the next page).

The calotte is available in the following diameters: Ø 110 mm and Ø 125 mm. The side of the outlet may be cut using an angle grinder, along the mark on the outlet tile. Pass the tube through the hole and continue the assembly on the inside.



8


The exhaust pipe must be mounted vertically. The bottom passage through the vapour barrier film and the thermal insulation must be prepared according to the relevant regulations and guidelines.

You can find information on the application areas of individual tile models in the following table.

A notice:

- The specifications of national regulations (such as ZVDH, ÖNORM or SIA standards) as well as national and European standards (such as DIN or EN) must be kept.
- The installer is responsible for the processing and installation of the products in accordance with the assembly instructions and the resulting tightness in the sub-roof.
- . CREATON South-East Europe Kft. has no responsibility for damage caused by improper installation.

## Compatible swissporTON clay tile models

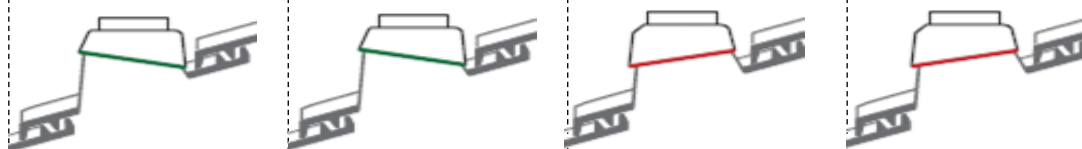

**CUTTED OUTLET  
TILE**

**UNCUTTED OUTLET  
TILE**

**UNCUTTED OUTLET  
TILE**

**CUTTED OUTLET  
TILE**

The hood (calotte) has to be adjusted according to the roof pitch (see the pictures above)

|                          |           |           |           |           |
|--------------------------|-----------|-----------|-----------|-----------|
| <b>MAGNUM</b>            | 10° - 20° | 20° - 35° | 35° - 50° | -         |
| <b>BALANCE</b>           | 10° - 20° | 20° - 35° | 35° - 50° | -         |
| <b>FUTURA</b>            | 10° - 20° | 20° - 35° | 35° - 50° | 50° - 55° |
| <b>TITANIA</b>           | 10° - 20° | 20° - 35° | 35° - 50° | -         |
| <b>PREMION</b>           | 10° - 30° | 30° - 40° | 40° - 50° | 50° - 55° |
| <b>VIVA</b>              | 10° - 25° | 25° - 33° | 33° - 50° | -         |
| <b>MZ3</b>               | 10° - 25° | 25° - 32° | 32° - 40° | 40° - 55° |
| <b>HARMONIE</b>          | 10° - 20° | 20° - 35° | 35° - 45° | -         |
| <b>NOMINA</b>            | 10° - 20° | 20° - 25° | 25° - 30° | 30° - 40° |
| <b>OPTIMA</b>            | 10° - 20° | 20° - 35° | 35° - 45° | -         |
| <b>CANTUS</b>            | 10° - 20° | 20° - 35° | 35° - 45° | -         |
| <b>ELEGANZ</b>           | 10° - 20° | 20° - 35° | 35° - 45° | -         |
| <b>DOMINO</b>            | 10° - 20° | 20° - 35° | 35° - 45° | 45° - 50° |
| <b>MIKADO</b>            | 10° - 20° | 20° - 35° | 35° - 45° | -         |
| <b>RAPIDO</b>            | 10° - 20° | 20° - 35° | 35° - 50° | -         |
| <b>RATIO</b>             | 10° - 20° | 20° - 35° | 35° - 45° | 45° - 50° |
| <b>RUSTICO</b>           | 10° - 20° | 20° - 35° | 35° - 45° | -         |
| <b>SINFONIE</b>          | 10° - 25° | 25° - 35° | 35° - 45° | 45° - 50° |
| <b>MELODIE</b>           | 10° - 25° | 25° - 35° | 35° - 45° | 45° - 50° |
| <b>MAXIMA PRO</b>        | 10° - 20° | 20° - 35° | 35° - 45° | 45° - 55° |
| <b>HERZZIEGEL</b>        | 10° - 20° | 20° - 35° | 35° - 45° | -         |
| <b>Plain tiles</b>       | 10° - 20° | 20° - 35° | 35° - 45° | -         |
| <b>Side interl. p.t.</b> | 10° - 20° | 20° - 35° | 35° - 45° | -         |

