

INSTALLATION GUIDE

Aluminium walking steps for plain tiles



Position the aluminium base element on the roof.

It can be used with double cover or in the case of crown cover as well.

If necessary use an additional batten for the fastening tab in the required distances.




Fasten the base element to the batten with the two corrosion-resistant screws provided in the package and with the third screw to the batten above it, through the fastening tab on the base element.

With crown cover the tiles need to be cut to the correct size in the top (second) row.



The single step is mounted on the platform of the aluminum base element and secured with the screw provided. A size 13 wrench is used for this.

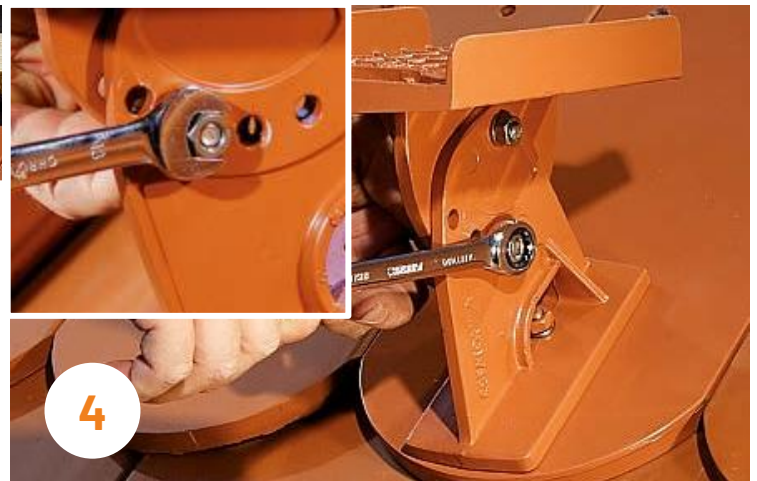

The screw on the rotary ring is removed so that the single step can be adjusted to the specified roof pitch.

A size 13 wrench is used for this.

i The swissporTON aluminum systems are installed on basic elements that match the shape and color of the roof tile. Step systems can be installed from a roof inclination of 10° to approx. 60° in accordance with DIN 18160-5

The walking grid systems are forbidden to be used as an anchoring point for safety harnesses.